

Quick Disconnect Coupling, Model : QDC



the right connection
the right environment

Ref. No : H03297, Release March 2018 (Dimensions in mm)

Description

Quick disconnect couplings are designed for applications where fast connection and disconnection of hydraulic lines is a need of the system.


These coupling when connected offer unrestricted flow passage.

They are designed for reliable and safe operations by avoiding premature flow before the coupling is fully closed.



Section

(Self sealing Coupling, Self sealing Adaptor, Illustrated)

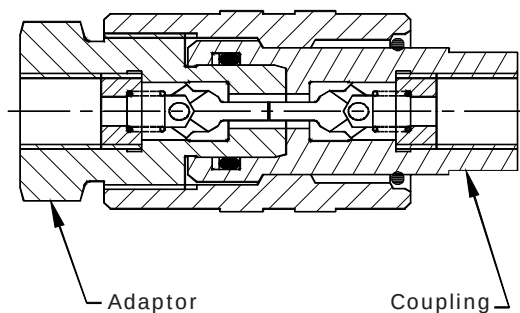

Hydraulic Symbol	Coupling Type	
	Through type Adaptor	AT
	Through type Coupling	CT
	Self sealing Adaptor	AS
	Through type Coupling	CT
	Through type Adaptor	AT
	Self sealing Coupling	CS
	Self sealing Adaptor	AS
	Self sealing Coupling	CS

Unit Dimensions

End connections (Female)

BSP - G
Metric - M






Table 1

Pressure (bar)	G	M	S1	S2	ØD	L
800	G 1/4	M14x1.5	27	19	35	86
800	G 3/8	M18x1.5	32	22	37	88
600	G 1/2	M22x1.5	41	30	46	116
500	G 3/4	M26x1.5	50	36	56	130
400	G1	M33x2.0	55	41	62	150

Quick Disconnect Coupling, Model : QDC

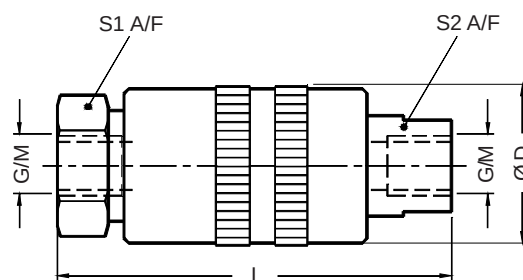

the right connection
the right environment


Ref. No : H03297, Release March 2018 (Dimensions in mm)

Technical Specifications

Construction Poppet type.
Operating pressure Refer table no.1
Hydraulic medium Mineral oil.
Viscosity range 10 cSt to 380 cSt.
Fluid temperature range -20 °C to +80 °C.
Fluid cleanliness As per ISO code 19/16 or better
Maximum flow handling capacity
M14 x 1.5 G 1/4
M18 x 1.5 G 3/8 - 30 lpm
M22 x 1.5 G 1/2
M26 x 1.5 G 3/4
M33 x 2.0 G 1

Caution : Pressure on the hydraulic lines must be relieved before they are connected / disconnected.

Ordering Code

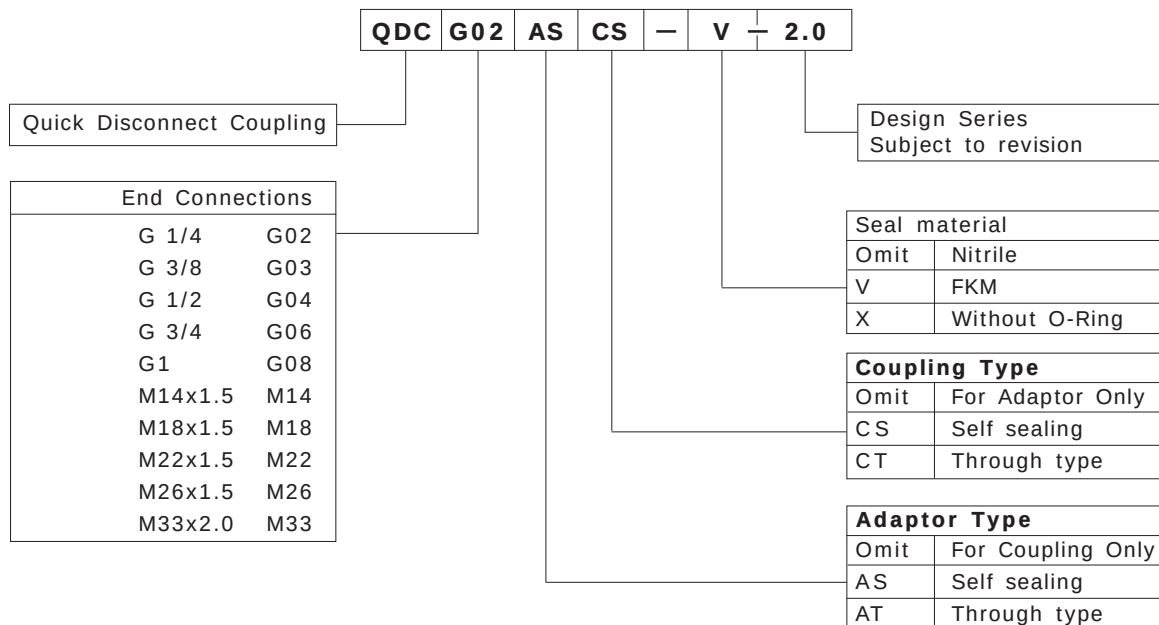

Note : Add prefix 316 to the existing part code for SS 316 Quick disconnect couplings.

e.g. **316-QDCG02ASCS-2.0**