

Straight Female Couplings


GAI-G

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434

Female BSPP (G) threads

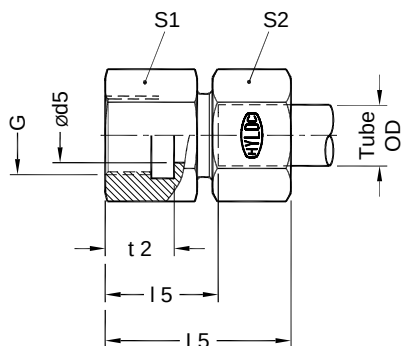

*									
Part No.	Series	Tube od	G	ød5	t 2	l 5	L 5	S1	S2
GAI06PLG	Light L 250 bar	6	G 1/8	4	12.0	19.0	34.5	14	14
GAI08PLG		8	G 1/4	6	17.0	24.0	39.0	19	17
GAI10PLG		10	G 1/4	8	17.0	25.0	40.5	19	19
GAI12PLG		12	G 3/8	10	17.0	26.0	41.0	24	22
GAI15PLG		15	G 1/2	12	20.0	31.0	47.0	27	27
GAI18PLG	160 bar	18	G 1/2	15	20.0	30.5	47.5	27	32
GAI22PLG		22	G 3/4	19	22.0	35.5	52.5	36	36
GAI28PLG	100 bar	28	G 1	24	24.5	38.0	56.0	41	41
GAI35PLG		35	G1.1/4	30	26.5	41.0	64.0	55	50
GAI42PLG		42	G1.1/2	36	28.5	42.5	66.0	60	60
GAI06PSG	Heavy S 630 bar	6	G 1/4	4	17.0	26.0	41.5	19	17
GAI08PSG		8	G 1/4	5	17.0	26.0	41.0	19	19
GAI10PSG		10	G 3/8	7	17.0	26.5	43.5	24	22
GAI12PSG		12	G 3/8	8	17.0	26.5	43.0	24	24
GAI16PSG	400 bar	16	G 1/2	12	20.0	31.5	50.5	30	30
GAI20PSG		20	G 3/4	16	22.0	34.5	57.0	36	36
GAI25PSG		25	G 1	20	24.5	37.5	62.5	41	46
GAI30PSG	250 bar	30	G 1.1/4	25	26.5	42.0	70.0	55	50
GAI38PSG		38	G 1.1/2	32	28.5	43.5	75.0	60	60

* Dimensions given are approx figures with tightened nut.