


Swivel Barrel Tee Couplings with O-Ring

EL

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434

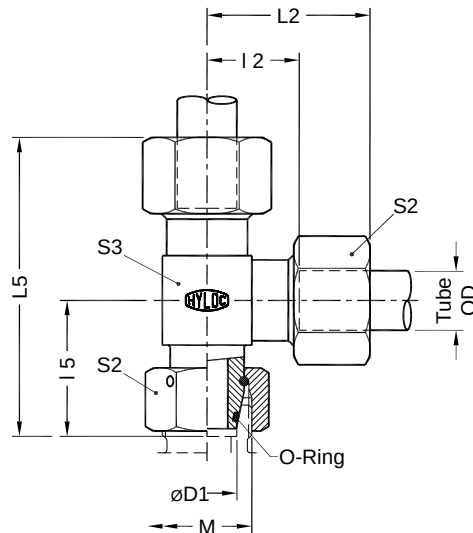

Part No.	Series	Tube od (øD1)	M	L2	L5	* L2	* L5	S2	S3	O - Ring ID x CSD
EL06PL	Light L 315 bar	6	M12 x 1.5	12.0	26.0	27.5	53.5	14	12	4.0 x 1.5
EL08PL		8	M14 x 1.5	14.0	27.5	29.0	56.5	17	14	6.0 x 1.5
EL10PL		10	M16 x 1.5	15.0	29.0	30.5	59.5	19	17	7.5 x 1.5
EL12PL		12	M18 x 1.5	17.0	29.5	32.0	61.5	22	19	9.0 x 1.5
EL15PL		15	M22 x 1.5	21.0	32.5	37.0	69.5	27	22	12.0 x 2.0
EL18PL		18	M26 x 1.5	23.5	35.5	40.5	76.0	32	27	15.0 x 2.0
EL22PL	160 bar	22	M30 x 2.0	27.5	38.5	44.5	83.0	36	30	20.0 x 2.0
EL28PL		28	M36 x 2.0	30.5	41.5	48.5	90.0	41	36	26.0 x 2.0
EL35PL		35	M45 x 2.0	34.5	51.0	57.5	108.5	50	46	32.0 x 2.5
EL42PL		42	M52 x 2.0	40.0	56.0	63.5	119.5	60	55	38.0 x 2.5
EL06PS	Heavy S 630 bar	6	M14 x 1.5	16.0	27.0	31.5	58.5	17	14	4.0 x 1.5
EL08PS		8	M16 x 1.5	17.0	27.5	32.0	59.5	19	17	6.0 x 1.5
EL10PS		10	M18 x 1.5	17.5	30.0	34.5	64.5	22	19	7.5 x 1.5
EL12PS		12	M20 x 1.5	21.5	31.0	38.0	69.0	24	22	9.0 x 1.5
EL16PS	400 bar	16	M24 x 1.5	24.5	36.5	43.5	80.0	30	24	12.0 x 2.0
EL20PS		20	M30 x 2.0	26.5	44.5	49.0	93.5	36	30	16.3 x 2.4
EL25PS		25	M36 x 2.0	30.0	50.0	55.0	105.0	46	36	20.3 x 2.4
EL30PS		30	M42 x 2.0	35.5	55.0	63.5	118.5	50	46	25.3 x 2.4
EL38PS	315 bar	38	M52 x 2.0	41.0	63.0	72.5	135.5	60	55	33.3 x 2.4

* Dimensions given are approx figures with tightened nut.